

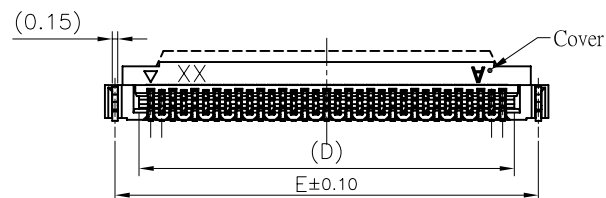


RoHS

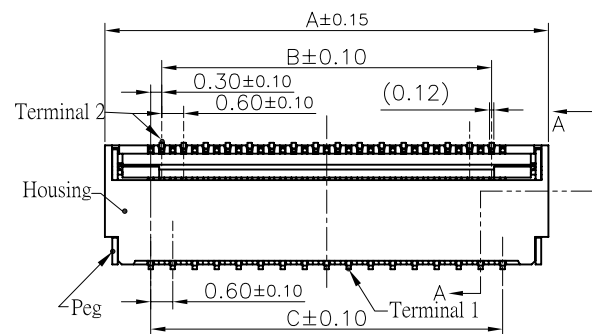


NOTES:



- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:NATURE;
COVER: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BLACK;
TERMINAL: COPPER ALLOY;
PEG: ALLOY;
- PLATING:
TERMINAL: GOLD PLATED ON NICKEL OVERALL.
PEG: TIN PLATED ON NICKEL OVERALL.
- RATING:
CURRENT RATING: 0.3A AC/DC
VOLTAGE RATING: 30V AC/DC
TEMPERATURE RANGE: -55°C~+85°C;
- PART NO.(P/N.):
FP0310A-OXX X XGL
PACKAGING
0-TAPE&REEL
1=TUBE
G-GOLD FLASH OVER NICKEL
T-3u"GOLD OVER NICKEL

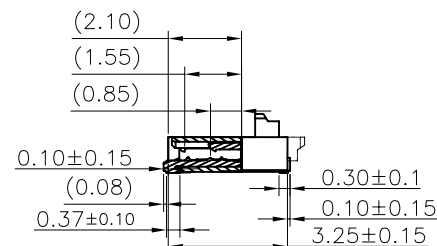

SECTION A-A

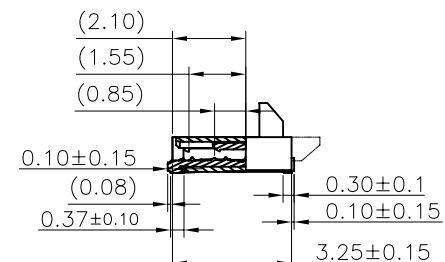

SECTION A-A

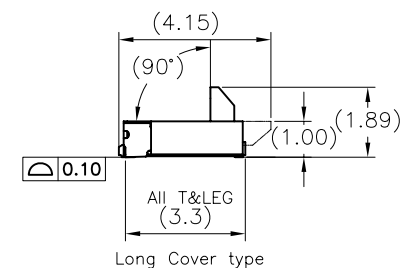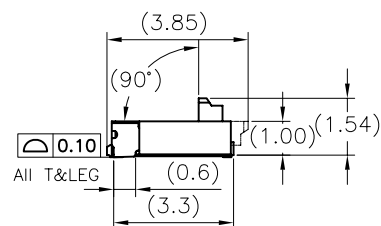

TOLERANCE UNLESS SPECIFIED			
DIM	TOL	DEC	TOL
X.	±--	X.*	±2*
X.X	±0.25	X.X*	±2*
X.XX	±0.15	X.XX*	±--
X.XXX	±0.05	X.XXX*	±--

DATE: 8/30'14

DAR.BY: LUKE

SHEET: 1/2

CHK.BY:

UNIT: mm

APP.BY:

CEMG

RUN YUAN TECHNOLOGY CO.,LTD



TITLE: 0.3PH 1.0H FPC W/COVER BACK-LOCK

REV.

DWG NO. FP0310A-OXXXXGL

A

RoHS

APPLICABLE FFC/FPC
FFC/FPC THICKNESS=0.20±0.03

FFC/FPC INSERT DIRECTION
RECOMMEND PCB LAYOUT

PIN 1 Point

PIN NO.(N)	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	NOTES
09	4.90	1.80	2.40	3.03	4.35	3.00	
11	5.50	2.40	3.00	3.63	4.95	3.60	
13	6.10	3.00	3.60	4.23	5.55	4.20	
15	6.70	3.60	4.20	4.83	6.15	4.80	
17	7.30	4.20	4.80	5.43	6.75	5.40	
19	7.90	4.80	5.40	6.03	7.35	6.00	
21	8.50	5.40	6.00	6.63	7.95	6.60	
23	9.10	6.00	6.60	7.23	8.55	7.20	
25	9.70	6.60	7.20	7.83	9.15	7.80	
27	10.30	7.20	7.80	8.43	9.75	8.40	
29	10.90	7.80	8.40	9.03	10.35	9.00	
31	11.50	8.40	9.00	9.63	10.95	9.60	
33	12.10	9.00	9.60	10.23	11.55	10.20	
35	12.70	9.60	10.20	10.83	12.15	10.80	
37	13.30	10.20	10.80	11.43	12.75	11.40	
39	13.90	10.80	11.40	12.03	13.35	12.00	
41	14.50	11.40	12.00	12.63	13.95	12.60	
43	15.10	12.00	12.60	13.23	14.55	13.20	
45	15.70	12.60	13.20	13.83	15.15	13.80	
47	16.30	13.20	13.80	14.43	15.75	14.40	
49	16.90	13.80	14.40	15.03	16.35	15.00	
51	17.50	14.40	15.00	15.63	16.95	15.60	
53	18.10	15.00	15.60	16.23	17.55	16.20	
55	18.70	15.60	16.20	16.83	18.15	16.80	
57	19.30	16.20	16.80	17.43	18.75	17.40	
59	19.90	16.80	17.40	18.03	19.35	18.00	
61	20.50	17.40	18.00	18.63	19.95	18.60	
63	21.10	18.00	18.60	19.23	20.55	19.20	
65	21.70	18.60	19.20	19.83	21.15	19.80	
67	22.30	19.20	19.80	20.43	21.75	20.40	
69	22.90	19.80	20.40	21.03	22.35	21.00	
71	23.50	20.40	21.00	21.63	22.95	21.60	

TOLERANCE UNLESS SPECIFIED				DATE:8/30'14	DAR.BY: LUKE
DIM	TOL	DEC	TOL	SHEET: 2/2	CHK.BY:
X.	±--	X.'	±2'		
X.X	±0.25	X.X'	±2'		
X.XX	±0.15	X.XX'	±--		
X.XXX	±0.05	X.XXX'	±--		
UNIT: mm				APP.BY:	

CEMG RUN YUAN TECHNOLOGY CO.,LTD

TITLE: 0.3PH 1.0H FPC W/COVER BACK-LOCK
DWG NO. FP0310A-0XXXXGL

REV. A