

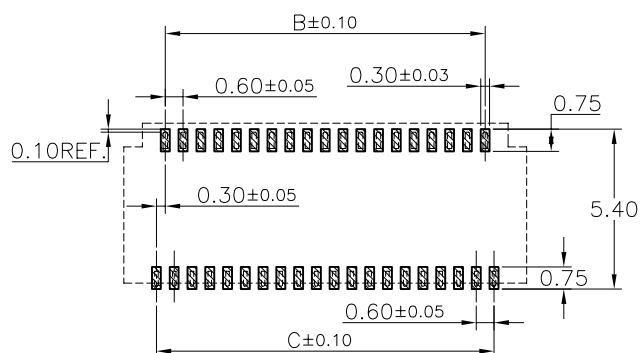
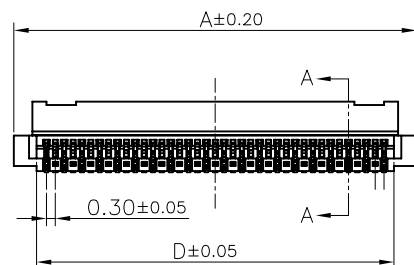




RoHS

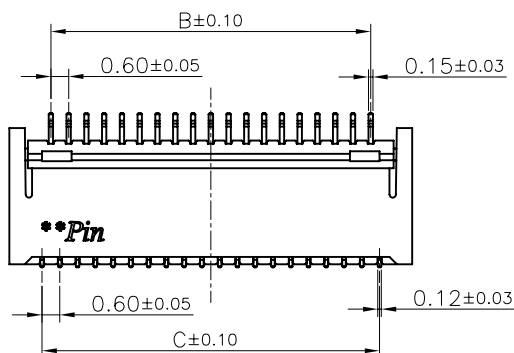

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

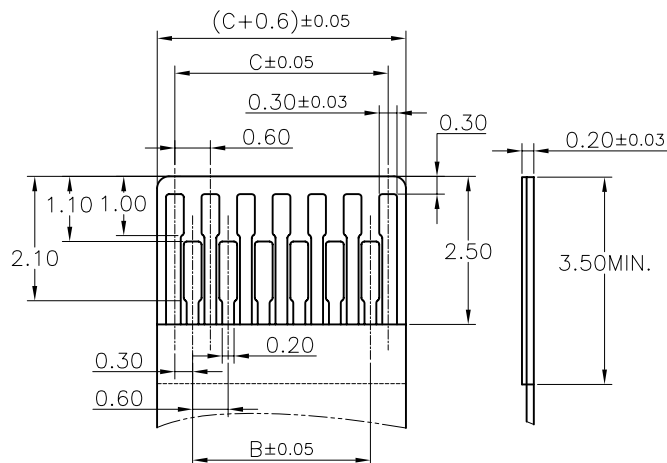

APPLICABLE FFC
TOLERANCE:±0.05
SCALE 2:1

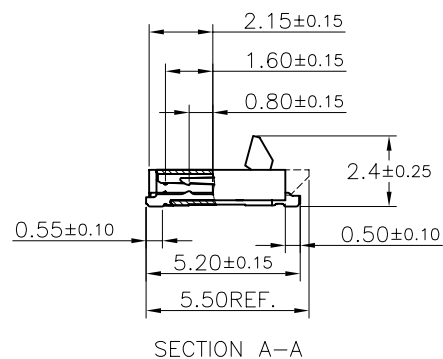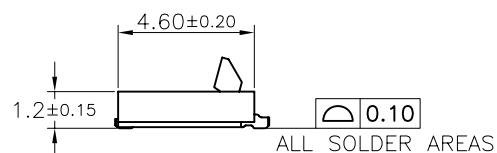


NOTES:

1. MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,
COLOR:NATURE;
SLIDER: HIGHT-TEMP PLASTIC,UL 94V-0,
COLOR:BLACK;
CONTACT: COPPER ALLOY;
2. PLATING:
CONTACT: GOLD PLATED ON NICKEL OVERALL.
3. RATING:
CURRENT RATING: 0.2A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -30°C~+85°C;
4. PART NO.(P/N.):
FP0312A - OXX X X YT

PACKAGING
0-TAPE&REEL
1-TUBE
G-GOLD FLASH OVER NICKEL
T-Au 2.5u"Min
PIN NO.

PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
13	5.80	3.00	3.60	4.27
17	7.00	4.20	4.80	5.47
21	8.20	5.40	6.00	6.67
23	8.80	6.00	6.60	7.27
25	9.40	6.60	7.20	7.87
27	10.00	7.20	7.80	8.47
29	10.60	7.80	8.60	9.07
31	11.20	8.40	9.00	9.67
33	11.80	9.00	9.60	10.27
35	12.40	9.60	10.20	10.87
39	13.60	10.80	11.40	12.07
41	14.20	11.40	12.00	12.67
45	15.40	12.60	13.20	13.87
51	17.20	14.40	15.00	15.67
61	20.20	17.40	18.00	18.67

DIM	TOL	DEC	TOL	DATE 20120702	DAR. : LUKE
X.	±--	X.*	±2*	SHEET 1/1	CHK. :
X.X	±0.25	X.X*	±2*		
X.XX	±0.15	X.XX*	±--	UNIT mm	APP. :
X.XXX	±0.10	X.XXX*	±--		



RUN YUAN TECHNOLOGY CO.,LTD

TITLE: 0.3PH 1.2H FFC W/COVER R/A SMT TYPE-CUST.

PART NO. FP0312A-OXXXXYT

REV.

A2