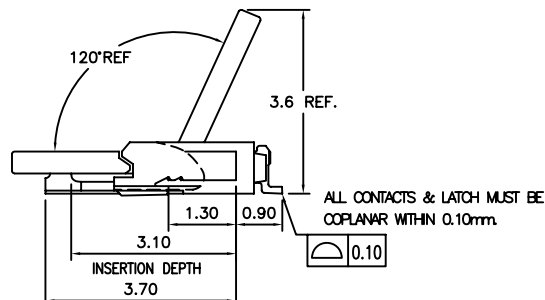

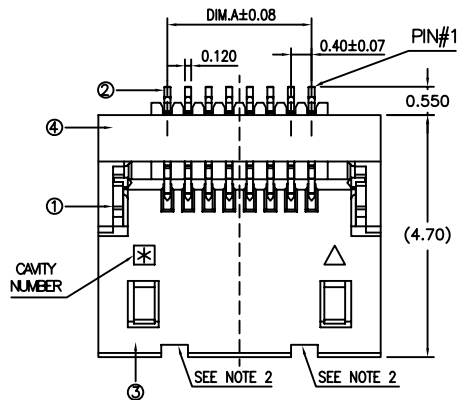




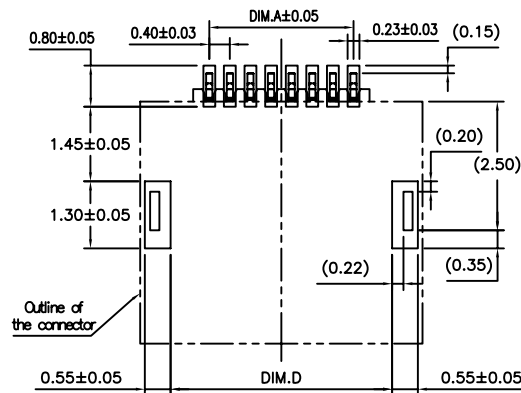


NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. MATERIAL:
INSULATORL.C.P SERIES,UL94 V-0,COLOR:NATUREAL
SPACERL.C.P SERIES,UL94 V-0,COLOR:BLACK
CONTACTPHOSPHOR BRONZE
HOLD DOWN....PHOSPHOR BRONZE
3. INJECTION GATE IS LOCATED ON LEFT OR RIGHT SIDE OF SPACER DEPENDING ON DIFFERENT CAVES.
4. Product NO:

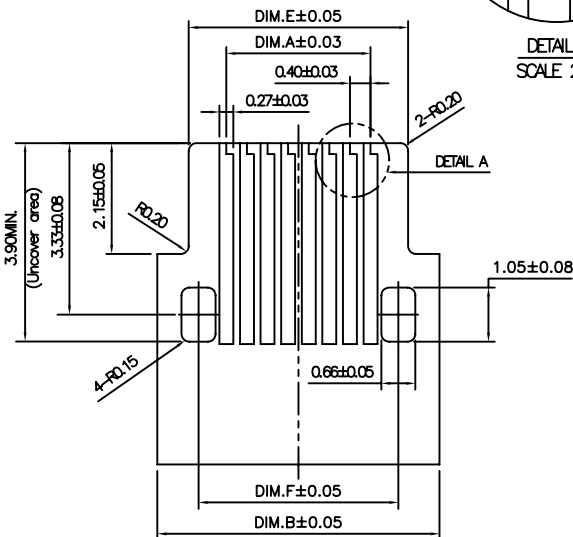

FP0410-0XX X X QH

PACKING
0:TAPE & REEL
1:TUBE
4:TAPE & REEL WITH MYLAR
5:TUBE WITH MYLAR
PLATING:O=Tin G=Gold flash
PIN

DETAIL A
SCALE 24:1

RECOMMENDED P.C BOARD PATTERN LAYOUT
RECOMMENDED METAL MASK THICKNESS T=0.15

SCALE 8:1

FPC/FFC LAYOUT
SCALE 8:1

POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
4	1.20	3.88	2.74	2.60	2.66	2.28
5	1.60	4.28	3.14	3.00	3.06	2.68
6	2.00	4.68	3.54	3.40	3.46	3.08
7	2.40	5.08	3.94	3.80	3.86	3.48
8	2.80	5.48	4.34	4.20	4.26	3.88
9	3.20	5.88	4.74	4.60	4.66	4.28
10	3.60	6.28	5.14	5.00	5.06	4.68
11	4.00	6.68	5.54	5.40	5.46	5.08
12	4.40	7.08	5.94	5.80	5.86	5.48
13	4.80	7.48	6.34	6.20	6.26	5.88
14	5.20	7.88	6.74	6.60	6.66	6.28
15	5.60	8.28	7.14	7.00	7.06	6.68
16	6.00	8.68	7.54	7.40	7.46	7.08
17	6.40	9.08	7.94	7.80	7.86	7.48
18	6.80	9.48	8.34	8.20	8.26	7.88
19	7.20	9.88	8.74	8.60	8.66	8.28
20	7.60	10.28	9.14	9.00	9.06	8.68

NO.	DESCRIPTION	QTY.	MATERIAL	FINISH
1	HOLD DOWN	2	PHOSPHOR BRONZE	TIN(MATTE) 50~100 μ" OVER ALL, NICKEL 50~100 μ" UNDER-PLATING. PLEASE SEE NOTES
2	CONTACT	POS.	PHOSPHOR BRONZE	
3	SPACER	1	L.C.P SERIES	
4	INSULATOR	1	L.C.P SERIES	

TOLERANCE UNLESS SPECIFIED	
LINEAR	ANGLE
.X ± 0.25	.X° —
.XX ± 0.15	.X° ± 3°
.XXX ± 0.10	.XX° —

DATE 2014.02.14

DAR. BY Lily

SCALE 1/1


CHK. BY

UNIT mm

APP. BY

CEMG

RUN YUAN TECHNOLOGY CO.,LTD



TITLE: 0.4PH 1.0H ZIF FPC CONN. LOCK TYPE

REV.

DWG NO. FP0410-0XXXXXQH

A