
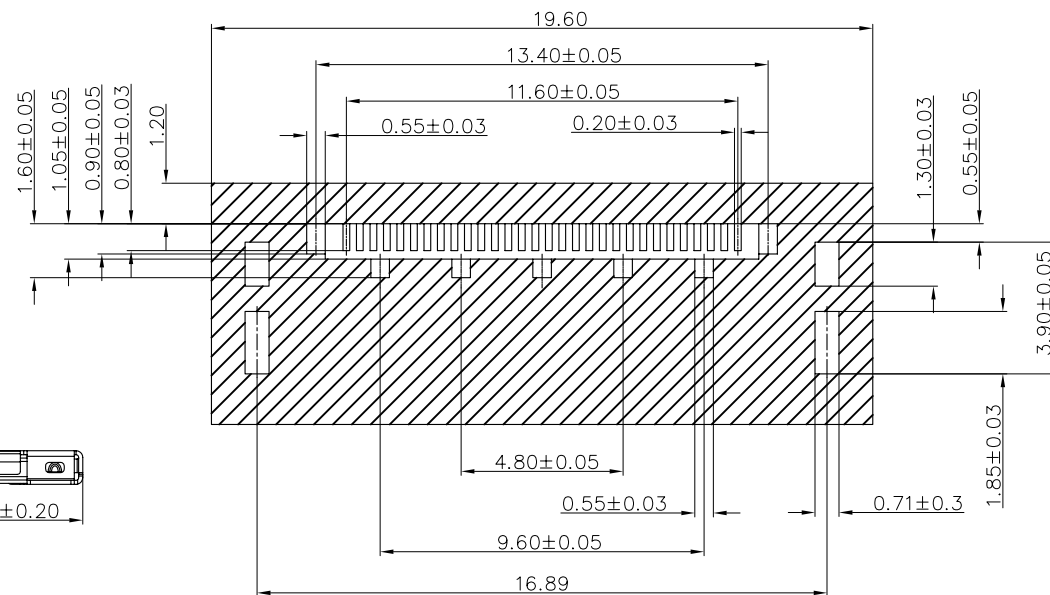



RoHS

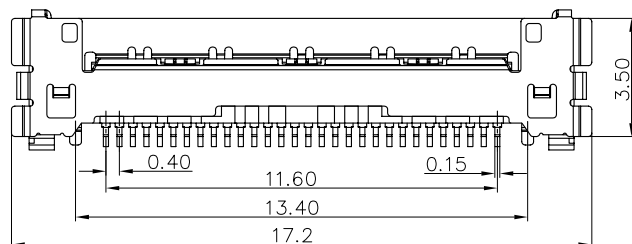

RECOMMENED FOOTPRINT PATTERN

NOTES:



- MATERIAL:
HOUSING: LCP BLACK;
TERMINAL: COPPER ALLOY /Au 1u" MIN ON CONTACT
AREA AND SELECTIVE AU 1u" MIN SOLDERING AREA OVER Ni 50u" MIN.
SHELL: COPPER ALLOY /Au OVER Ni 50u" MIN.
- THE WARPAGE OF PRODUCT SHOULD BE NOT EXCEED 0.10mm.
- PART NO.:

LV0410E-030 G 0 LS

PACKING
0: TAPE & REEL
1: TUBE

PLATING: O= Tin G=Gold flash

PIN

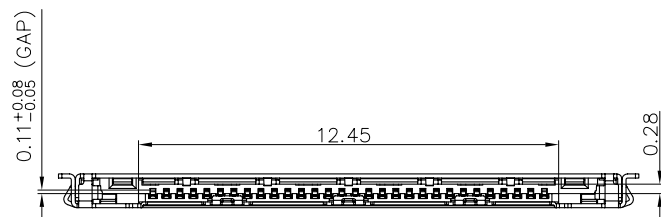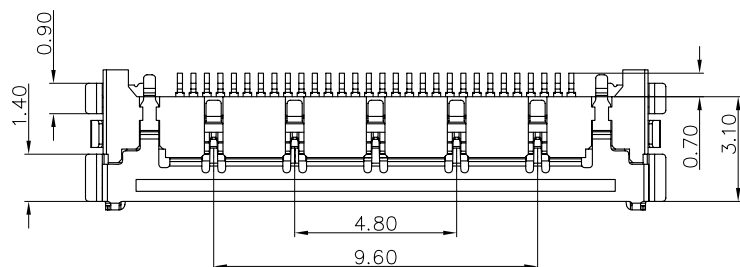

TOLERANCE UNLESS SPECIFIED	
LINEAR	ANGLE
X. --	X° --
.X ±0.20	.X° ±2°
.XX ±0.10	.X° ±1°
.XXX --	.XX° --

DATE 2014.06.15

DAR. BY Lily

SCALE 1/1


CHK. BY Chen

UNIT mm

APP. BY

CEMG

RUN YUAN TECHNOLOGY CO.,LTD



TITLE: 0.4PH H=1.0MM LVDS PLUG CONN.

REV.

DWG NO. LV0410E-030G0LS

A