

NOTES:

1. MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BLACK;
COVER: HIGHT-TEMP PLASTIC,UL 94HB,COLOR:BROWN;
CONTACT: COPPER ALLOY,T=0.10mm ;


2. PLATING:
CONTACT: 60~120u" Nickel UNDERPLATED OVERALL.
Au(SEE PART NO.) PLATING
ON CONTACT AREA AND SOLDER AREA.

3. RATING:
CURRENT RATING: 0.2A
VOLTAGE RATING: 50V AC
TEMPERATURE RANGE: -55°C~+85°C;


4. PART NO.(P/N.):

FP0309A - 0XX X X Y T





PACKAGING:
0:TAPE&REEL
G:Au 2.5u",MIN.
T:Au 3u",MIN.
A:Au 5u",MIN
PIN NO.

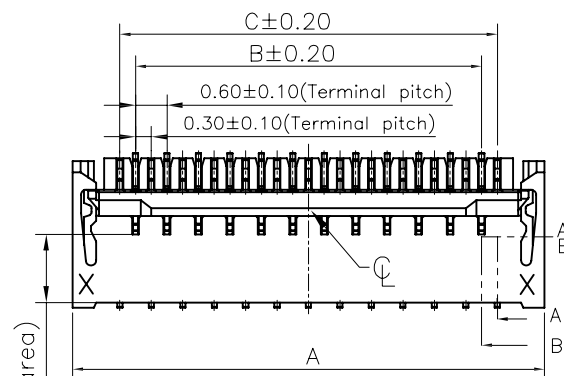


1.35(Suction area)

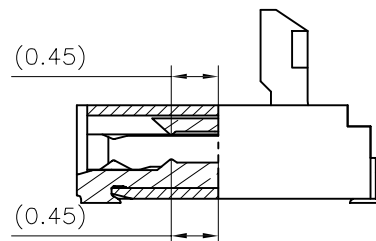

SECTION A-A
SCALE 2:1

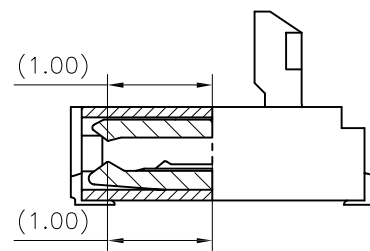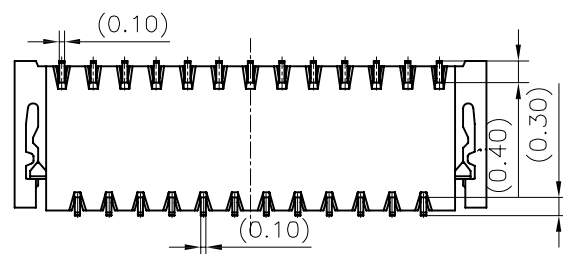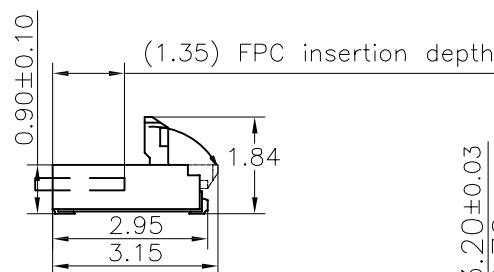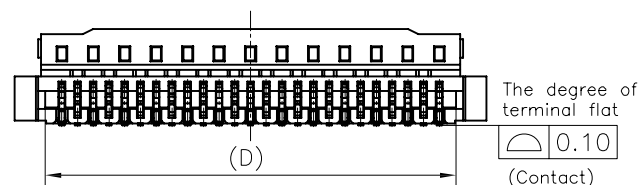

SECTION B-B
SCALE 2:1

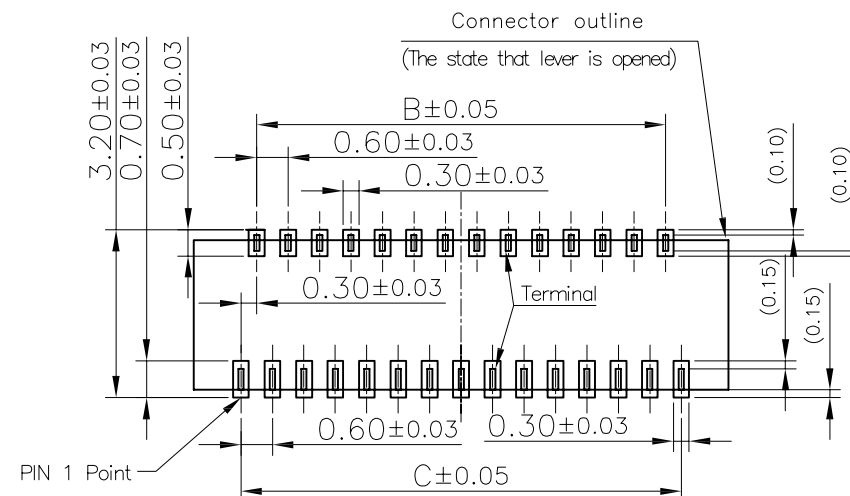

TOLERANCE UNLESS SPECIFIED

LINEAR	ANGLE
X. ±--	X. ° ±3°
X.X ±0.3	X.X° ±3°
X.XX ±0.3	X.XX° ±--
X.XXX ±0.2	X.XXX° ±--

DATE 20160728

SHEET 1/2

UNIT mm


DRWN: LUKE

CHKD:

APPD:

CEMG

RUN YUAN TECHNOLOGY CO.,LTD




TITLE: 0.3P 0.9H FPC W/COVER BACK-LOCK SMT TYPE ASSY.

DWG NO. FP0309A-0XXXXYT


REV.

A


RoHS

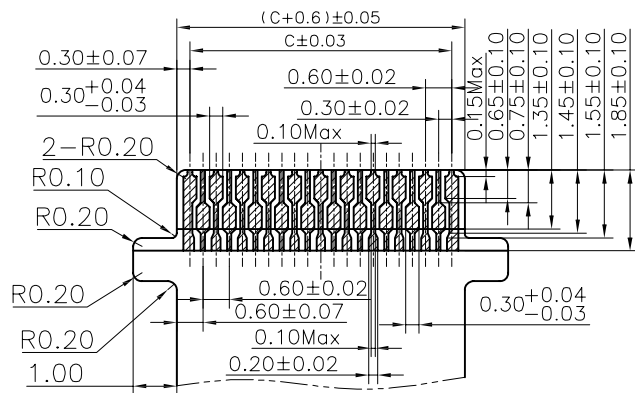


With insertion confirming tabs and lead platings

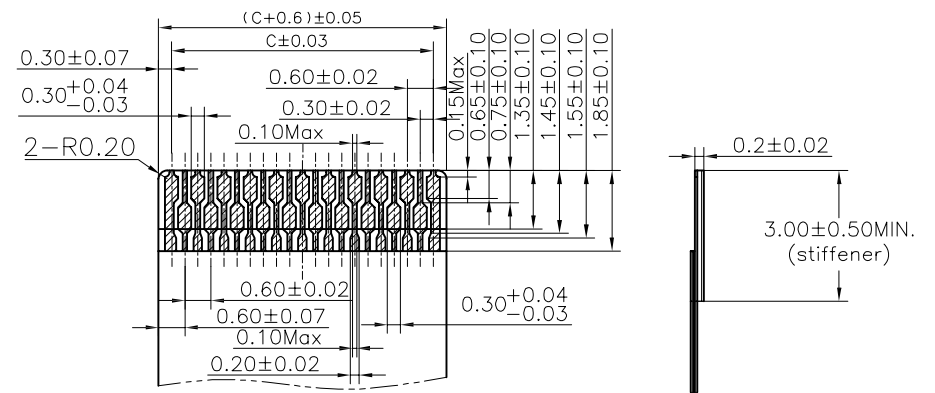

Without insertion confirming tabs and lead platings

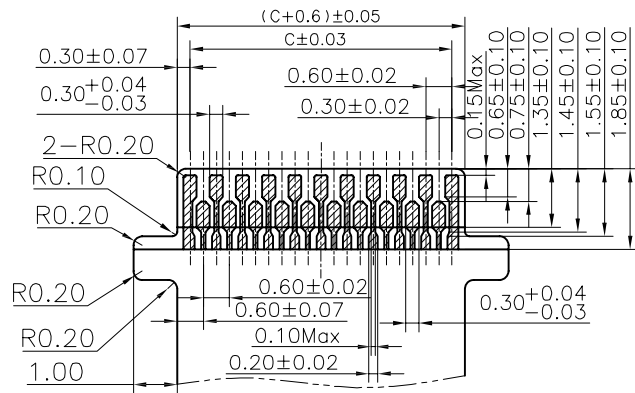

With insertion confirming tabs but lead platings

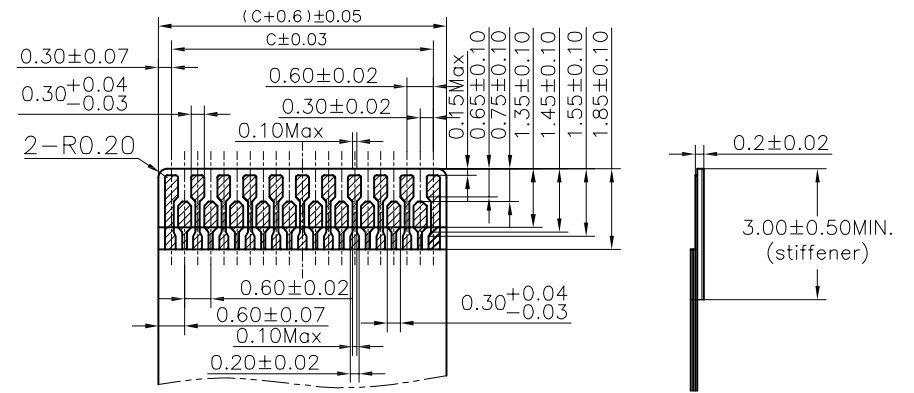

Applicable FPC(Ref.)

Without insertion confirming tabs but lead platings

PIN NO.	DIM A	DIM B	DIM C	DIM D	PIN NO.	DIM A	DIM B	DIM C	DIM D
07	3.60	1.80	1.20	2.43	31	10.80	9.00	8.40	9.63
09	4.20	2.40	1.80	3.03	33	11.40	9.60	9.00	10.23
11	4.80	3.00	2.40	3.63	35	12.00	10.20	9.60	10.83
13	5.40	3.60	3.00	4.23	37	12.60	10.80	10.20	11.43
15	6.00	4.20	3.60	4.83	39	13.20	11.40	10.80	12.03
17	6.60	4.80	4.20	5.43	41	13.80	12.00	11.40	12.63
19	7.20	5.40	4.80	6.03	43	14.40	12.60	12.00	13.23
21	7.80	6.00	5.40	6.63	45	15.00	13.20	12.60	13.83
23	8.40	6.60	6.00	7.23	47	15.60	13.80	13.20	14.43
25	9.00	7.20	6.60	7.83	49	16.20	14.40	13.80	15.03
27	9.60	7.80	7.20	8.43	51	16.80	15.00	14.40	15.63
29	10.20	8.40	7.80	9.03					

TOLERANCE UNLESS SPECIFIED

LINEAR	ANGLE
X. ±—	X. ° ±2°
X. X ±0.10	X. X° ±2°
X. XX ±0.05	X. XX° ±—
X. XXX ±0.03	X. XXX° ±—

DATE 20160728

SHEET 2/2

UNIT mm


DRWN: LUKE

CHKD:

APPD:

CEMG

RUN YUAN TECHNOLOGY CO.,LTD



TITLE: 0.3P 0.9H FPC W/COVER BACK-LOCK SMT TYPE ASSY.

DWG NO. FP0309A-0XXXXYT

REV. A